

## Uses

### for single offset joints

- Manhole
- Box Culverts
- Elliptical Pipe
- Reinforced Concrete Pipe




## Advantages

- Lubricant is factory installed prior to shipment, eliminating the instance of dirt or foreign material being attached to the outside of gasket during fitting.
- Contractor does not need to equalize the gasket after fitting to spigot.
- Little or no joint kickback.
- Lower insertion force.

## Specifications

The gaskets are manufactured to meet the following material specifications:

**ASTM C425, C443, C361, CSA A-257  
AS1646, EN681**

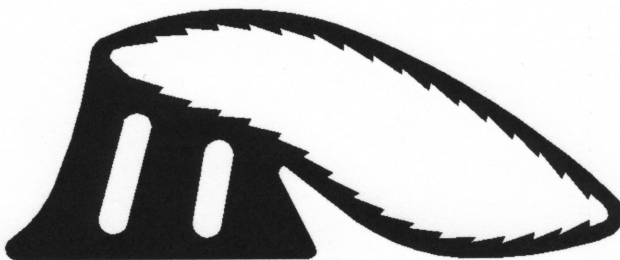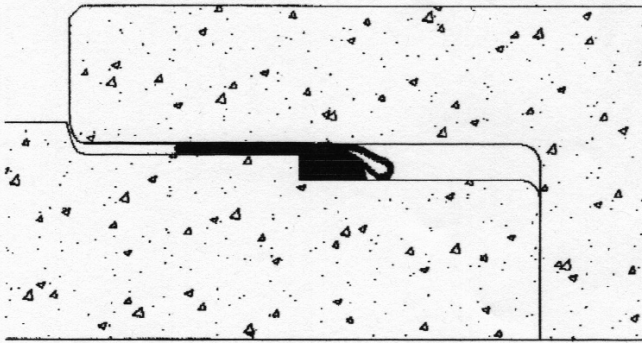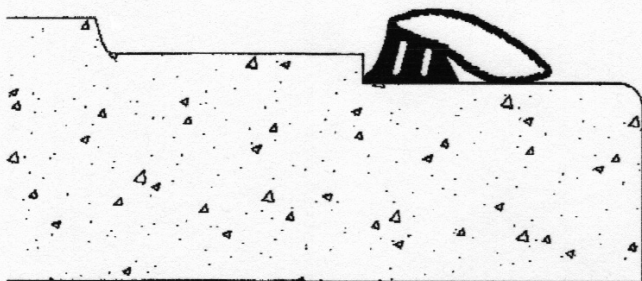

### C-Tech Rubber USA LLC

2234 Daniel Island Drive Phone: 843 856 8384  
Daniel Island SC 29492 Fax: 843 216 7985  
USA Cell: 843 822 0664  
Email: [steve@ctech-rubber.com.au](mailto:steve@ctech-rubber.com.au)

### C-Tech Rubber Pty Ltd

17 Devon Road Ph: 61 2 9829 3022  
Ingleburn NSW 2565 Fax: 61 2 9829 3022  
Australia  
Email: [sales@ctech-rubber.com.au](mailto:sales@ctech-rubber.com.au)

